

# R9 Miniature Rocker Switches


## Features

- Lighted or non-lighted
- Snap-in mounting
- Quick connect terminals
- approvals available

## Specifications

- Rating ..... 6A 250V AC
- Mechanical Life ..... 15,000 Cycles
- Electrical Life ..... 10,000 Cycles
- Contact Resistance ..... 20mΩ max.
- Insulation Resistance ..... 1,000MΩ min.
- Dielectric Strength ..... 1,500V AC for 1 Minute  
3,000V AC between poles

Panel Thickness (mm)	Length (mm)
0.7 ~ 1.25	19.0 + 0.2
1.26 ~ 2.0	19.3 + 0.2
2.1 ~ 3	19.6 + 0.2

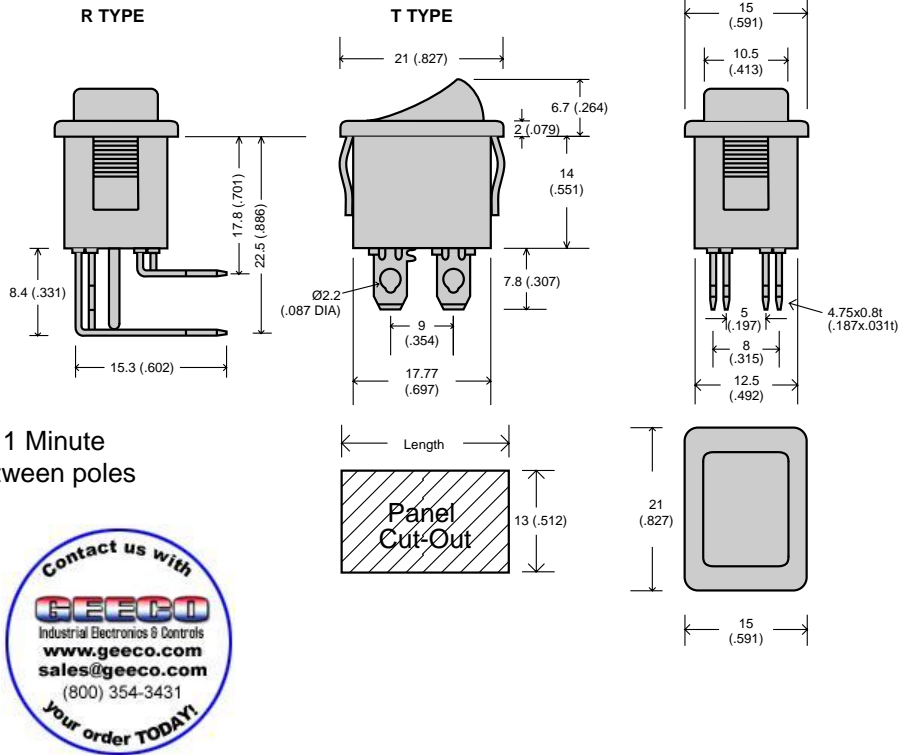

## Ordering Information:

R9  — 2 —  —  —  —  —  —

<b>Function</b>	<b>Rating</b>	<b>Housing Color</b>	<b>Rocker Color</b>	<b>Marking</b>	<b>Terminal Type</b>	<b>Lamp Voltage</b>										
1=SPST 9=SPST w/Neon D=DPST Y=DPST w/Neon	2=6A,250V AC	K=Black W=White	K=Black W=White O=Orange R=Red Y=Yellow M=Green	<table border="0"> <tr> <td>A = </td> <td>F = </td> </tr> <tr> <td>B = </td> <td>G = </td> </tr> <tr> <td>C = </td> <td>H = </td> </tr> <tr> <td>D = </td> <td>I = </td> </tr> <tr> <td>E = </td> <td>L = </td> </tr> </table>	A =	F =	B =	G =	C =	H =	D =	I =	E =	L =	 T Type  R Type	0=No Lamp 1=125V AC 2=250V AC 3=12V DC 4=24V DC 6=6V DC
A =	F =															
B =	G =															
C =	H =															
D =	I =															
E =	L =															

